



Hebden Everyday Grid is a high performance, durable and low maintenance plastic grid used as a surface solution for grass and gravel in a SUDS (Sustainable Drainage Systems) compliant permeable paving system.

Hebden Everyday Grid blocks are connected by an interlocking structure and installed on a porous base course. Their role is to transfer loads from the surface to the engineered course base below.

The purposes of SUDS (Sustainable Drainage Systems) are to minimise water runoff quantity, improve water quality and provide amenity and biodiversity. Both BREEAM and the Code for Sustainable Homes address the benefits of permeable paving as a SUDS technique and award credits accordingly. SUDS already form part of government planning policy.

Hebden Everyday Grid with a grass or gravel finish can be effective in:

- **Minimising water runoff quantity**
- **Improving water quality**
- **Providing clean water for amenity and biodiversity**

Applications

- **Permanent and overspill car parks**
- **Driveways, cycle routes & pathways**

Product Benefits

- SUDS compliant. Hebden Everyday Grid with grass or gravel can improve project ratings in accordance with BREEAM
- When laid, Hebden Everyday Grid with offers excellent water permeation through the surface. It reduces the potential for clogging compared to an in situ concrete paving system
- Durable, non-rotting and weather resistant. Over 10 year expected product life
- The lightweight interlocking profile design enables ease and speed of installation.
- Load bearing capability at 250 - 350 tonnes/m², on a correctly specified and compacted sub-base
- Low maintenance & cost effective throughout the product life
- NBS Specification support in accordance with Q23 for gravel surfacing or Q30 for seeding/turfing
- Hebden Everyday Grid conforms to Part M of the Building regulations and is Disability Discrimination Act compliant when it is correctly laid and maintained
- Made from 100% plastic waste which might otherwise go to landfill. Hebden Everyday Grid reduces the carbon footprint of a project. It's fully recyclable at the end of its product life



Product Specification

- **Material:** 100% recycled polyethylene & polypropylene
- **Production process:** The polymer is blended and fed under high pressures into moulds
- **Load bearing:** 250 - 350 tonnes/m² on a correctly specified and compacted sub-base
- **Block dimensions:** 330 x 330 x 40 mm
- 9 blocks per m²



- **Cell profile:** 63 x 63 mm internal.
Approx. 85% open cells/m²
- **Weight:** 4.14kg/m²
- **Connection type:** T slugs and slots
- **Colour:** Black
- **Delineators:** White circular inserts. Can be used to mark up areas such as parking bays and routes. 6 per continuous linear metre
- **Surface finish:** Gravel or Grass

Delineators

Simply push fit into the Hebden Everyday Grid blocks, before filling to create white lines, shapes and even words.

Diameter	Height	Colour
----------	--------	--------

Hebden Everyday Grid Permeable Paving Specification

& Installation Guide

The following are intended as a general guide in accordance with BS7533. For further details on permeable paving design refer to BS7533 Part 13; for installation refer to BS7533 Part 3.

The design for pavements should satisfy two parts - to support the traffic load and to manage the surface water effectively.

Subgrade Assessment

The strength of a subgrade is measured by California Bearing Ratio (CBR). The design

CBR should be obtained either by testing or by measurement of the plasticity index of the subgrade material. In the case of CBR testing, the method described in BS1377-4:1990+A2:2002, Clause 7 should be used. The table below gives typical values for the subgrade strengths (the CBR).

The surface of the subgrade material should be prepared according to the Highways Agency's Specification for Highway Works, Clause 616. Detailed preparation of the subgrade should be in accordance with the recommendations in BS7533-3. An acceptable subgrade level should be free of any soft spots, reasonably parallel to the plane of construction. A capping layer may be required if the ground is structurally weak, likely to be subjected to exceptional loads or is significantly below the specified ideal formation level.

Table 1. Soil classification guide

Soil classification	Typical range for coefficient of permeability, k (m/s)	Typical range of CBR values when read in conjunction with Table 2	Plasticity index
Heavy clay	10 ⁻¹⁰ to 10 ⁻⁸	2 to 5	40 to 70
Silty clay	10 ⁻⁹ to 10 ⁻⁸	3 to 6	30
Sandy clay	10 ⁻⁹ to 10 ⁻⁶	5 to 20	10 to 20
Poorly graded sand	5 x 10 ⁻⁷ to 5 x 10 ⁻⁶	10 to 40	—
Well graded sand	5 x 10 ⁻⁶ to 10 ⁻⁴	10 to 40	—
Well graded sandy gravel	10 ⁻⁵ to 10 ⁻³	30 to 80	—

Permeable Paving Systems


A permeable pavement is required to absorb 180 litres / second / hectare. Permeable paving with Hebden Everyday Grid can be an effective means of providing a structural pavement suitable

for pedestrians and vehicular traffic whilst allowing water to pass straight through the surface into the pavement construction for temporary storage, storm attenuation and dispersal to the ground or collection. Generally, there are three permeable paving systems:

A. Full Infiltration System

Suitable for existing subgrade with good permeability. The system allows all the water falling onto the pavement to infiltrate down through the constructed layers below and eventually into the subgrade. Some retention of the water will occur

temporarily in the permeable sub-base layer allowing for initial storage before it eventually passes through. No water is discharged into conventional drainage systems, completely eliminating the need for pipes and gulleys, and making it a particularly economic solution.

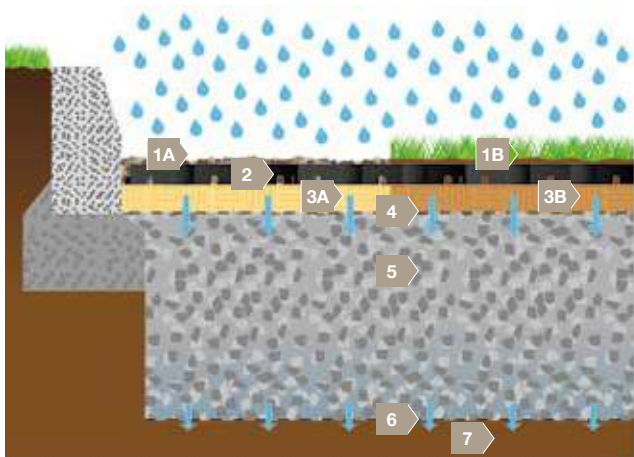


- 1A Gravel
- 1B Grass
- 2 Hebden Everyday Grid
- 3A Laying course
- 3B Root zone
- 4 Upper geotextile
- 5 Permeable sub-base
- 6 Lower geotextile
- 7 Subgrade

B. Partial Infiltration System

Used where the existing subgrade may not be capable of absorbing all the water. A fixed amount of water is allowed to infiltrate – which, in practice, often represents a large percentage of the rainfall.

Outlet pipes are connected to the permeable sub-base and allow the excess water to be drained to other drainage devices, such as swales, watercourses or sewers.

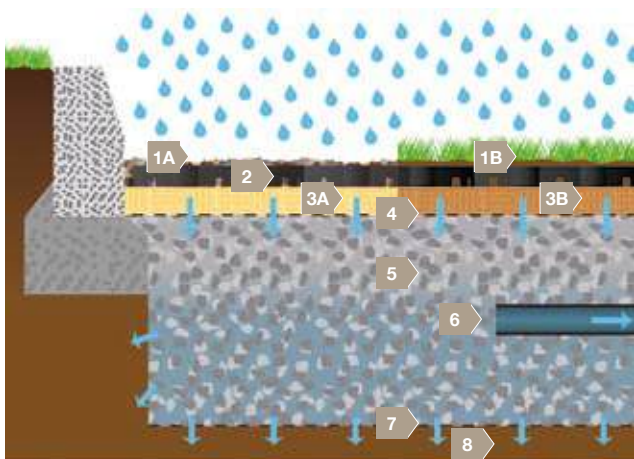


- 1A Gravel
- 1B Grass
- 2 Hebden Everyday Grid
- 3A Laying course
- 3B Root zone
- 4 Upper geotextile
- 5 Permeable sub-base
- 6 Drainpipe
- 7 Lower geotextile
- 8 Subgrade

C. No Infiltration System

Where the existing subgrade permeability is poor or contains pollutants, this system allows for the complete capture of the water. It uses an impermeable, flexible membrane placed on top of the subgrade level and up the sides of the permeable sub-base to effectively form a storage tank. Outlet pipes are constructed on top of the

impermeable membrane to transmit the water to watercourses, sewers or other treatment systems. The system is particularly suitable for contaminated sites, as it prevents pollutants from being washed further down into the subgrade where they could reach groundwater.

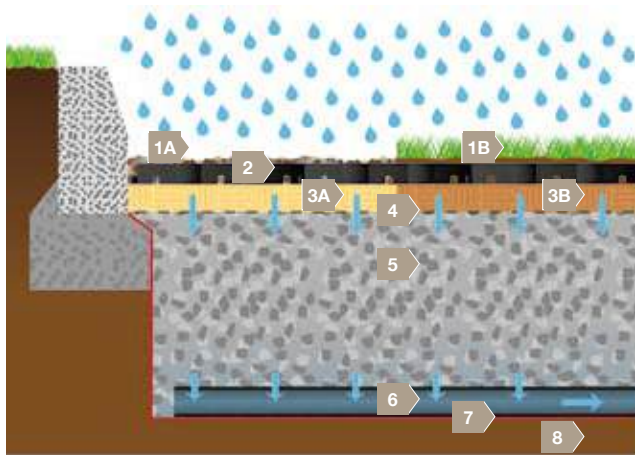

1A	Gravel
1B	Grass
2	Hebden Everyday Grid
3A	Laying course
3B	Root zone
4	Upper geotextile
5	Permeable sub-base
6	Drainpipe
7	Impermeable flexible membrane
8	Subgrade



System Selection

Table 2 below recommends appropriate pavement systems for a range of sub-grade conditions. Please read in conjunction with Table 1 for soil classification. For System A and System B, the highest recorded groundwater level should be

greater than 1000mm below the bottom of the sub-base. This is to allow filtration of pollutants in the soil below the pavement and also to prevent groundwater rising and reducing the available storage in the sub-base.

Table 2. Guidance on selection of a permeable paving system

		System A - total infiltration	System B - partial infiltration	System C - no infiltration
Permeability of subgrade defined by coefficient of permeability, k (m/s)	10 ⁻⁶ to 10 ⁻³	✓	✓	✓
	10 ⁻⁸ to 10 ⁻⁶	✗	✓	✓
	10 ⁻¹⁰ to 10 ⁻⁸	✗	✗	✓
Highest recorded water table within 1000mm of formation level		✗	✗	✓
Pollutants present in subgrade		✗	✗	✓

Sub-base Thickness

The design of the pavement is approached by considering the sub-base thickness required to meet both the hydraulic factors and the loading factors. The greater sub-base thickness identified for either of these factors is adopted.

■ **Hydraulic factors** - The design should take into account the water storage volume in the sub-base and the rate of infiltration/restricted outflow rate. The thickness of the sub-base required to provide sufficient water storage capacity can be obtained using Table 3.

Table 3. Sub-base thicknesses to provide sufficient water storage capacity for Systems A, B & C

Rainfall data	r ^{A)}	Required sub-base thickness (mm)					
		1 in 30 year event		1 in 100 year event		1 in 100 year event plus 20% climate change	
		Systems A & B	System C	Systems A & B	System C	Systems A & B	System C
M60 ^{B)} = 20 mm	0.4	120	120	160	160	210	210
	0.3	140	140	190	190	240	240
	0.2	180	180	250	250	310	310
M60 = 17 mm	0.4	100	100	140	140	180	190
	0.3	110	120	160	160	210	210
	0.2	150	150	210	210	270	270
M60 = 14 mm	0.4	—	—	—	—	—	—
	0.3	90	90	130	130	170	170
	0.2	110	120	170	160	220	220

A) Ratio of a 60 minute storm rainfall depth to the depth of the 2-day maximum rainfall depth.

B) 60 minute storm recurring every 5 years.



Tables below show the pavement course thickness and material type suitable for subgrades with a CBR \geq 15%.

Table 5. Systems A & B – selection of pavement course material and thickness

Category/application	Hebden Everyday Grid block/laying course (mm)	Hydraulically bound base (mm)	Coarse graded material (mm)
Domestic	40 / 40-50	-	250
Car parking	40 / 40-50	-	350
Lightly trafficked roads	40 / 40-50	125	150

Table 6. System C – selection of pavement course material and thickness

Category /application	Hebden Everyday Grid block/laying course (mm)	Hydraulically bound base (mm)	Coarse graded material (mm)	Capping layer (mm)
Domestic	40 / 40-50	-	250	150
Car parking	40 / 40-50	-	350	150
Lightly trafficked roads	40 / 40-50	125	150	150

The additional thickness to be provided in the case of low CBR can be taken from Table 7 for Systems A and B and Table 8 for System C. The use of geotextile / grid reinforcement products can enhance the load bearing capability of the subgrade. Further advice should be sought from the relevant manufacturers.

Table 7. Additional thickness of coarse graded material for Systems A and B

CBR of subgrade (%)	Adjustment of coarse graded material (mm)
1	300 ^{A) B)}
2	175 ^{B)}
3	125 ^{B)}
4	100 ^{B)}
5	Use table 5 for thickness
8	Use table 5 for thickness
10	Use table 5 for thickness
15	Use table 5 for thickness

A) Expert guidance should be sought.
 B) Subgrades of CBR less than 5% are often too fine to permit sufficient infiltration.

Table 8. Total thickness of capping material for System C

CBR of subgrade (%)	Adjustment of capping layer (mm)
1	600 ^{A)}
2	350
3	250
4	200
5	Use table 6 for thickness
8	Use table 6 for thickness
10	Use table 6 for thickness
15	Use table 6 for thickness

A) Expert guidance should be sought.

Material Selection

In a permeable pavement system, there is a requirement for stiffness but the base aggregate also needs to be permeable to allow water to flow through it and to have sufficient void space for water storage. Conventional DTp Type 1 sub-base is not recommended.

Sand and gravel with rounded particles should not be used in permeable pavement sub-base construction. Two gradings of sub-base material for permeable paving are given in Table 9 below, conforming to BS EN12620:2002 GC 90/15 4/40 and 4/20 coarse aggregates.

Table 9. Sub-base material gradings for permeable paving

Sieve size (mm)	Percentage passing	
	Coarse aggregate, 4/40	Coarse aggregate, 4/20
80	100	—
63	98-100	—
40	90-99	100
31.5	—	98-100
20	25-70	90-99
10	—	25-70
4	0-15	0-15
2	0-5	0-5
1	—	—

Table 10. Laying coarse material gradings for permeable paving

BS Sieve size (BS EN993-1) (mm)	Percentage passing
14	100
10	98-100
6.3	80-99
2.0	0-20
1.0	0-5

Note: Necessary measures should be taken to prevent migration of the laying course material into the sub-base, e.g. by using a geotextile or by using compatible gradings of laying course and sub-base materials.

Installation Notes

- The preparation of the subgrade, the construction of the sub-base and the construction and type of roadbase (if present) should generally be in accordance with relevant current practice as described in the Highways Agency's Specification for Highway Works.
- It is essential that the sub-base compaction is thorough, using a vibrating plate compactor or vibrating roller.
- The thickness of the laying course after final compaction of the surface course should be 40 - 50mm, within an accepted surface level tolerance. All areas of prepared laying course material should be protected and not left exposed overnight.
- The laying course may be placed and screeded using a mechanical device.
- It is necessary to include a substantial edge restraint when constructing Hebden Everyday Grid permeable paving with grass / gravel finishes. Edge restraints need to be sufficiently robust to withstand override by any anticipated traffic, to withstand thermal expansion and to prevent loss of laying course material. Typical examples of edge restraints are kerbs, channels, established structures, and rigid abutments such as securely fixed paving units.



Place the blocks onto the prepared sub-base and laying course. The leading edge of the blocks should have the fixing lugs exposed for quick installation. No pegging is required. Always protect the outer edge with edging strips. Stand on laid blocks when laying the next row.

- An expansion gap at 0.1mm per metre per °C should be incorporated along the edges.
- Connect the blocks using lugs and slots, progressing over the area in rows.
- Blocks can be cut to fit around obstructions and contours. Any that need to be cut should be measured and cut prior to installation where possible leaving full, complete cells along the outer edge. Cut pieces less than half of the original size should be avoided where possible.

- Hebden Everyday Grid delineators can be inserted into the Hebden Everyday Grid blocks before filling, to create lines, shapes and even words.



Surface Finish

Gravel

- Fill the Hebden Everyday Grid blocks to the top of the cells with gravel in accordance with NBS section Q23 for gravel surfacing. The use of 6 - 10mm angular aggregate is recommended to achieve the best result.
- A light vibrating plate can be used to consolidate the blocks and to settle the gravel. Top up the cells as required after settlement. Do not overfill.
- The surface may be trafficked immediately.
- Over time top up gravel as necessary.



Grass

- An optional weed suppressant membrane can be used on top of the sub-base before applying the sharp sand. This will prevent weed growth but will allow for natural drainage of rain water to the ground below.
- Carry out seeding in accordance with NBS section Q30 for seeding or turfing.
- Use a 70/30 or 60/40 root zone mixture. Initially fill to 7 - 10 mm below the top surface of each grid as this will protect the grass in its early growing phase.
- A light vibrating plate can be used to consolidate the blocks and to settle the root zone infill.
- The whole area can then be seeded and watered. A very light top dressing may be applied to just cover the seed and to provide adequate germination conditions. Do not overfill.
- The surface should not be trafficked immediately. Allow the grass to fully establish prior to use, typically 8 weeks.

Notes:

1. Maximum advised gradient for traffic applications without pegging: 5%
2. During the design stage, consideration should be given to the potential for extraordinary use of the surface. The incorporation of bays and edges in design layout and/or the setting of a speed limit of 10 - 15 miles / hour or other calming methods to avoid heavy braking is advised if there is a possibility of abusive use.

Call us today on Tel: 01422 419 555

**for more information on Hebden
Everyday Grid porous paving
blocks. Alternatively email us on
info@britishrecycledplastic.co.uk**

References:

- BS7533-3:2005 + A1:2009
- BS7533-7:2010
- BS7533-13:2009
- BS EN13242:2002 + A1:2007
- The Highways Agency:
Specification for Highway Works
- The Environment Agency:
Guidance on the permeable
surfacing of front gardens
- Building Regulations 2010
Approved Document M1
Access and Use

**BRITISH
RECYCLED
PLASTIC**

